


Features

- Intel Cedar Trail 1.86GHz N2800 dual core Atom Processor.
- Intel NM10 Express chipset.
- Single DDR-3 SO-DIMM supports up to 4GB 800/1066MHz DDR3 memory.
- Intel Embedded Graphic Engine integrated in Intel NM10 chip.
- VGA + HDMI.
- Two Realtek RTL8111F Gigabit LAN ports.
- 2 x SATAII, 1 x MINI-PCIE slot.
- 6 USB 2.0, one VGA, one HDMI, one Mic-in, one Line-out, two Gigabit LAN ports on board edge.

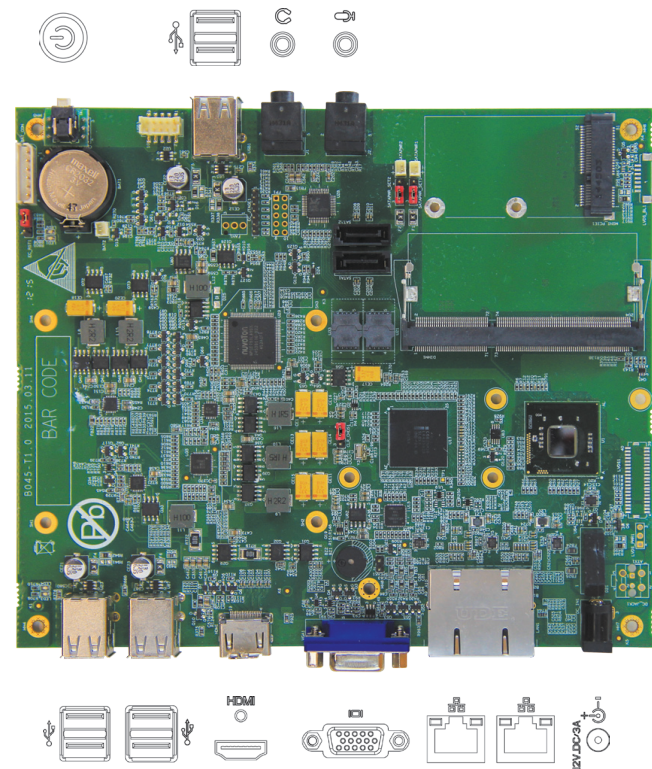

Specifications

Form Factor

Dimensions	7.40 x 6.54 inch / 188 x 160 mm (L x W)
------------	---

Processor system

CPU	Intel 1.86GHz N2800 Dual Core Atom CPU
Core Number	2
Max Speed	1.86GHz
Chipset	N2800 (CPU + Northbridge) + NM10 (Southbridge)
BIOS	AMI BIOS

Expansion slots

PCI	N/A
Mini-PCle	1
mSATA	N/A
PCIe	N/A
CFast Card Socket	N/A

Memory

Technology	DDR3 (800/1066MHz)
Max.	4GB
Socket	1 x SO-DIMM

Graphics

Controller	Integrated in Intel NM10 Express Chip
VRAM	Shared Memory
VGA	Supports max. resolution 1920x1080
LVDS	N/A
HDMI	Supports max resolution 1920x1080
DVI	N/A
Display Port	N/A
Multi Display	YES

Ethernet

Interface	10/100/1000 Mbps
Controller	GbE LAN: Realtek RTL8111F
Connector	2x RJ-45

SATA

Max Data Transfer Rate	SATA2 (3.0Gb/s)
------------------------	-----------------

Rear I/O

VGA	1
DVI	N/A
HDMI	1
DisplayPort	N/A
Ethernet	2
USB	6 (USB 2.0)
Audio	1 x Mic-in, 1 x Line-out
Serial	N/A
eSATA	N/A
PS/2	N/A

Internal Connector

USB	1 (USB2.0 x 2 header)
LVDS / inverter	N/A
VGA	1
Serial	N/A
SATA	2 x SATA2 (3.0Gb/s)
mPCle	1
Parallel	N/A
mSATA	N/A
GPIO 8-bit	N/A
SATA PWR Output Con	N/A
Speaker Header	N/A
Smart Battery Header	1
SIM card	N/A
Stackable I/O	N/A
Layer1	N/A
Layer2	N/A

Watchdog Timer

Watchdog Timer	Programmable 1 - 255 sec
----------------	--------------------------

Power Requirements

Power Requirement (Max)	12V DC-IN
Power Consumption (Max)	24W

Environment

Operating Temperature	0-60°C (32~140°F)
Storage Temperature	-40~85°C (-40~185°F)
Relative Humidity	0~95%